

Technical drawing of a mechanical part, showing a top view and a side view.






Top View:

- Overall diameter: 105
- Inner diameter: 30
- Central hole diameter: 12.5
- Distance from center to the start of the central slot: 25 ± 0.2
- Distance from center to the end of the central slot: 50
- Distance from center to the start of the outer slot: 12.5
- Distance from center to the end of the outer slot: 12.5

Side View:

- Overall width: 105
- Inner width: 30
- Central hole diameter: 12.5
- Distance from center to the start of the central slot: 25 ± 0.2
- Distance from center to the end of the central slot: 50
- Distance from center to the start of the outer slot: 12.5
- Distance from center to the end of the outer slot: 12.5

主 仕 様	
最高使用圧力	30 MPa
最小油路径	φ12
使用流体	鉱物性作動油
最大使用油温	MAX. 60℃
最高使用回転数	30 rpm
重量（実測）	8.8Kg

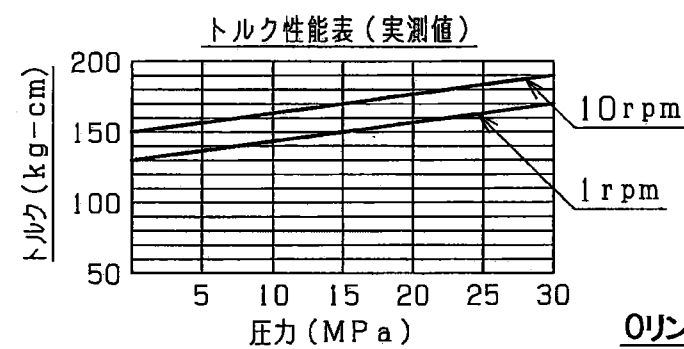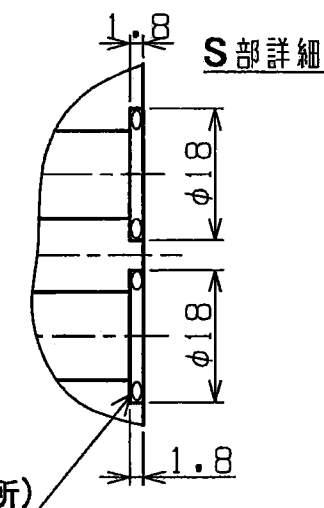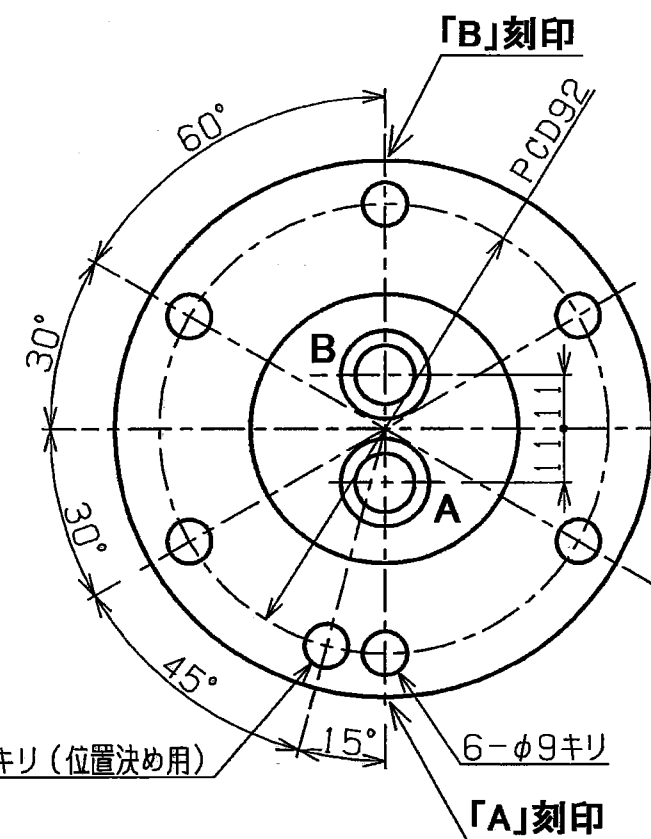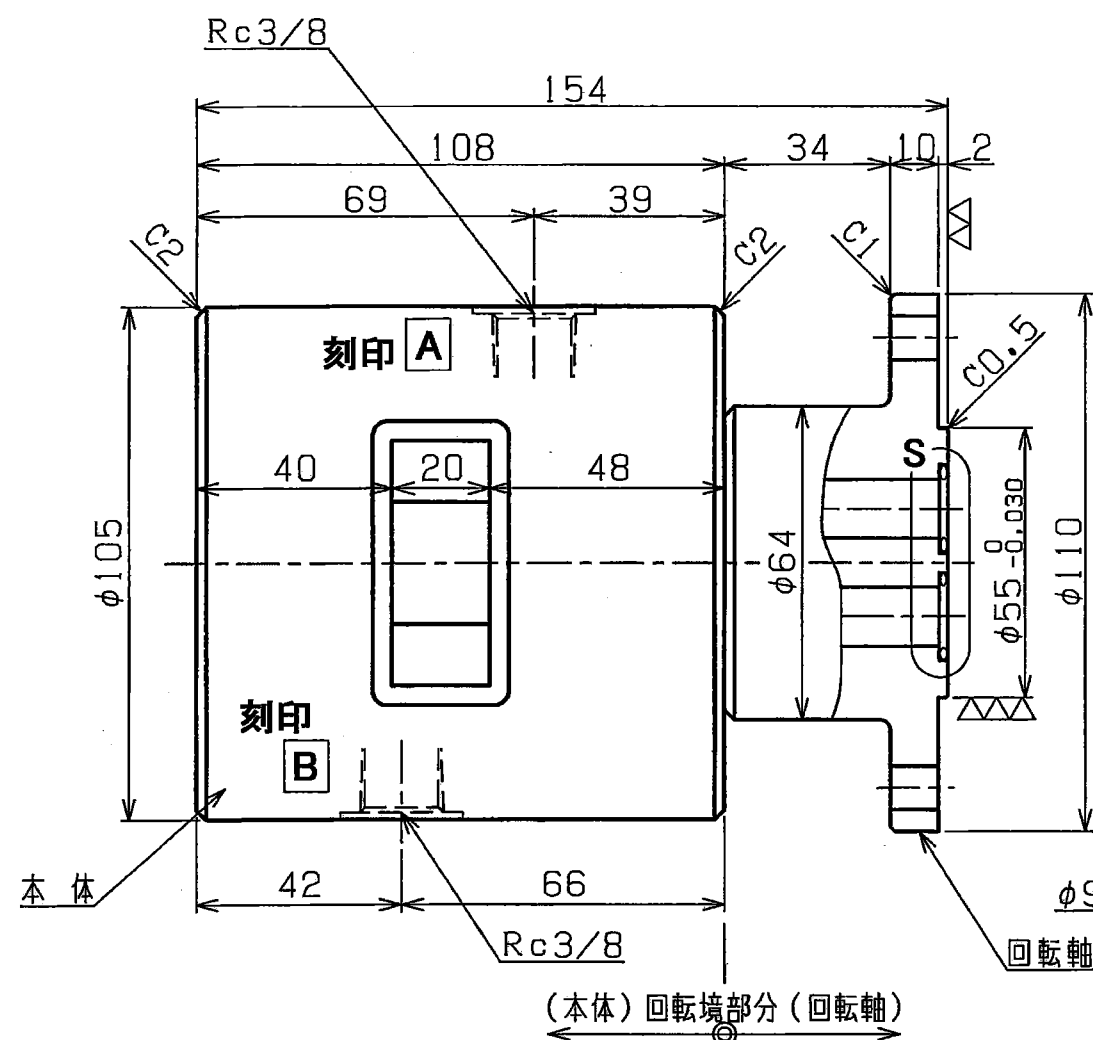

リング 1B-P14(2ヶ所)

1201257307

PLAN RECORD	基本仕上							
		MARK	PARTICULAR	QUAN	MATERIAL	SIZE	WEIGHT	REMARK
	寸法許容差	C H I E F		RJ2-30-68N-21BT ROTARY JOINT				
	区分許容差	H E A D						
	1 ~ 4 ±0.1	CHECKED BY						
	5 ~ 16 ±0.2	DRAWN BY		DRAWING NO.		A 3 - 2 0 5 8 A		
	17 ~ 63 ±0.3	DATE DRAWN						
	64 ~ 250 ±0.5	SCALE 1/1		 リックス株式会社				
	250~1000 ±0.8							

記号
400S
100S ▽
25S ▽▽
6.3S ▽▽▽
0.8S ▽▽▽▽